



DESCRIPTION

CR7W-ch.2-6 LQ

Special design wide-band channel eliminator, removes CATV Low Band channels 2 thru 6 from the CATV spectrum for reuse, and passes the remainder of the TV spectrum from DC -46 MHz, 95 -870 MHz.

Example frequency response graph provided below.




Model CR7W-ch.2-6

SPECIFICATIONS

- Selectivity: 8 MHz transition
- Stopband: 55dB typical
- Bandwidth: 5 to 870 MHz
- Supplied with final production graphs
- Dimensions(in): 7 x 3.5 x 1.75 (lxwxh)
- RF Power handling: .5 watt
- Impedance: 75 ohms
- Connectors: F-type female

Example Graph: Frequency Response

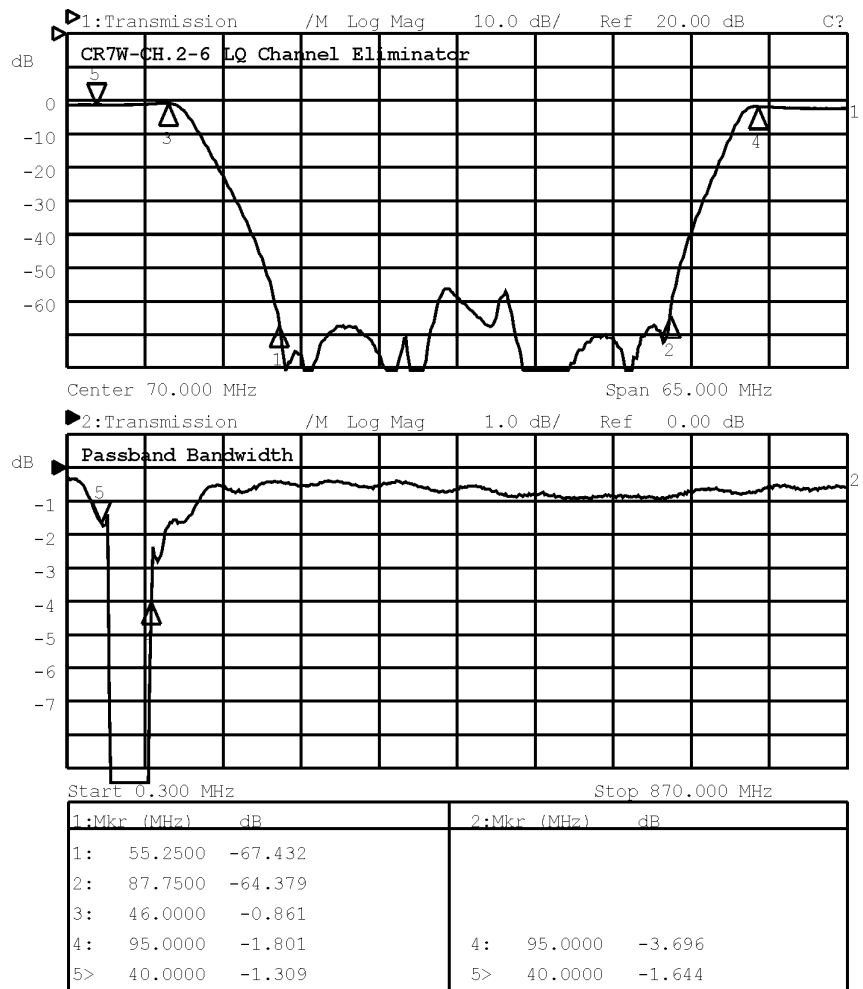

GENERAL HOOKUP

